



FLOOR PLATES STÛV 30

EN

INSTALLATION MANUAL





REQUIRED MATERIAL



Standard silicone liquid glue




IMPORTANT

This document is an additional manual to the **Stûv 30** installation manual. For a successful installation, it is important to carefully follow these instructions, as well as those in the **Stûv 30** installation manual.



FP1 - Rotation 0°


StûvGrey 13090504

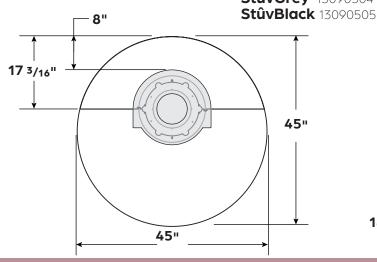

Thickness

14 gauge | 0.0747"

FP2 - Rotation 90°

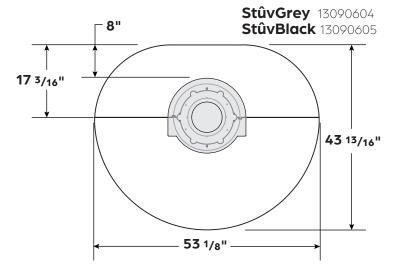


FP3 - Rotation 180°


StûvGrey 13090704 StûvBlack 13090705

FP4 - Rotation 360°



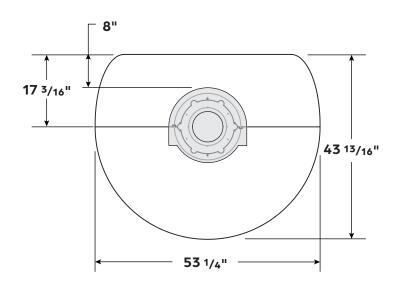

Thickness 14 gauge | 0.0747"

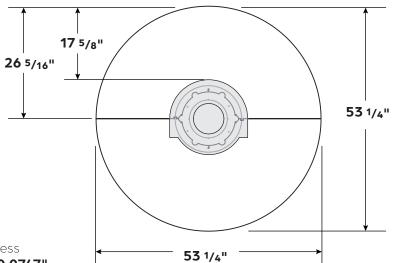



Step 1 Install the center plate at the final location of the stove. Use a laser and the notches on the plate to align it to the center of the smoke outlet.

Secure the plate with #8 wood screws.

Step 2 The floor plate is a finishing accessory that is put in place after the Stûv 30 has been installed. The stove therefore needs to be set up and connected first.

Step 3 Clean the surface around the Stûv 30 where the floor plate will be installed.




FRAGILE


When handling the plate, remove any accessories or other that could damage the paint (belt, ring, tools, etc.).

Step 4 Place the two parts at the front and back of the stove and connect them like puzzle pieces.


Step 5 Slightly lift each part separately to apply standard silicone liquid glue to different spots. Apply a reasonable amount to keep it from oozing out.


Step 6 To make sure the floor plate is level, add heavy items to flatten the silicone. Leave for the entire drying period recommended in the silicone's instructions.







2











Stûv fireplaces are designed by:

Stûv sa – Belgique stuv.com

Rue Jules Borbouse n°4 B-5170 Bois-de-Villers

And manufactured in North America by:

Stûv America inc. – Canada stuvamerica.com

34, Boulevard de l'Aéroport Bromont QC Canada J2L 1S6

1-514-396-3463 | 1-866-487-7888