






Produit

85

95

125

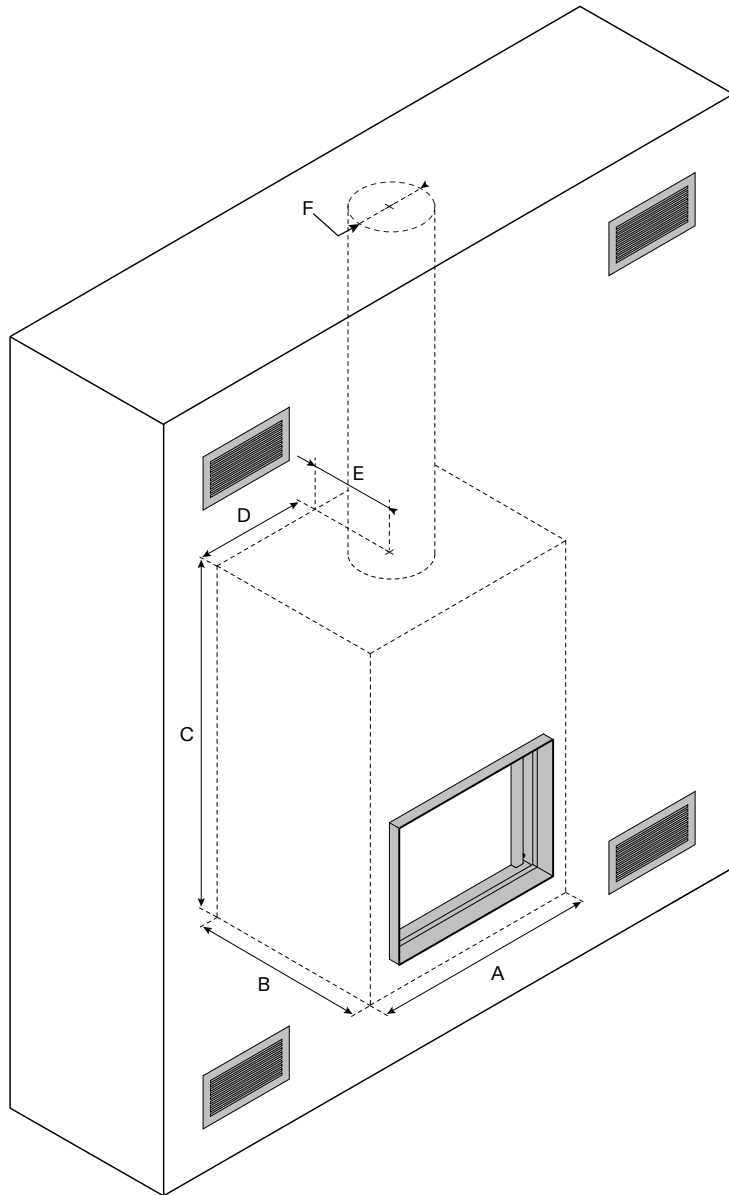

Performances

Consommation de bois	13 - 15 lb/h	13 - 15 lb/h	13 - 15 lb/h
Puissance maximale	44 000 BTU/h	43 000 BTU/h	60 000 BTU/h
Certifications	UL / ULC	UL / ULC	UL / ULC
Volume chambre de combustion	6.5 pi ³	8.4 pi ³	10.6 pi ³
Bûches - Longueur maximale	24"	28"	40"
Superficie de chauffage estimée	1 400 pi ²	1 600 pi ²	1 800 pi ²
Poids	752 lb	855 lb	960 lb


Dimensions

[A] Largeur	40"	43 7/8"	55 3/4"
[B] Profondeur	31 1/2"	31 1/2"	31 1/2"
[C] Hauteur	62"	68 1/4"	62"
[D] Centre cheminée - latérale	19 7/8"	21 7/8"	27 3/4"
[E] Centre cheminée	15 3/4"	15 3/4"	15 3/4"
[F] Diamètre cheminée	10"	12"	12"
Ø Raccord air extérieur	4"	6"	6"
Largeur vitre	26 1/2"	30 3/8"	42 1/8"
Hauteur vitre	21 1/16"	24 1/4"	21 1/16"



Cadre fin


contour 1/8"



L	31 1/8"	35 1/16"	47 7/8"
H	24"	27 3/16"	24"
Couleur	Gris Stûv ●		

Cadre appliqué


contour 2 3/8"



L	35 7/16"	39 1/2"	51 5/16"
H	28 7/16"	31 5/8"	28 7/16"
Couleur	Gris Stûv ●		

sf4


contour 9 7/16"



L	49 3/4"	53 11/16"	65 1/2"
H	42 5/8"	45 3/4"	42 5/8"
Couleurs	Gris Stûv ●	Blanc RAL 9010 ○	
	Noir ●	Gris RAL 9007 ●	
		Fini rouille ●	




sf5



L	42 1/16"	46 5/8"	58 7/16"
H	81 3/4"	88"	81 3/4"
Couleurs	Gris Stûv ●	Blanc RAL 9010 ○	
	Noir ●	Gris RAL 9007 ●	
		Fini rouille ●	

sf6



L	42 1/16"	46 5/8"	58 7/16"
H	81 3/4"	88"	81 3/4"
Couleurs	Gris Stûv ●	Blanc RAL 9010 ○	
	Noir ●	Gris RAL 9007 ●	
		Fini rouille ●	