




Product	58	68	78
---------	----	----	----

Available in Canada only




Performances

Particulate matter	1.5 g/h	1.7 g/h	1.8 g/h
Burn rate	4.1 lb/h	4.1 lb/h	4.4 lb/h
Efficiency (EPA)	71 %	66 %	67 %
Maximum heat output	65 000 BTU/h	82 000 BTU/h	86 000 BTU/h
EPA heat output	27 015 BTU/h	23 727 BTU/h	27 092 BTU/h
Nominal heat output	46 000 BTU/h	50 000 BTU/h	58 000 BTU/h
Certifications	UL / ULC / EPA / CSA B415.1-22	UL / ULC / EPA / CSA B415.1-22	UL / ULC / CSA B415.1-22
Combustion chamber total	1.6 ft³	1.9 ft³	2.2 ft³
Logs - Maximum length	17"	21"	25"
Estimated heating area	1 400 ft²	1 650 ft²	2 100 ft²
Weight	180 lb	205 lb	228 lb

Dimensions


[A] Width	22 7⁄8"	26 3⁄4"	30 3⁄4"
[B] Depth	17 5⁄16"	17 5⁄16"	17 5⁄16"
[C] Height	23 7⁄8"	23 7⁄8"	23 7⁄8"
[D] Center chimney - side	11 7⁄16"	13 3⁄8"	15 3⁄8"
[E] Center chimney - back	4 7⁄16"	4 7⁄16"	4 7⁄16"
[F] Chimney diameter	6" or 7"	6" or 7"	6" or 7"
Ø Outside air connection	4"	4"	4"
Glass width	17 5⁄8"	21 5⁄8"	25 1⁄2"
Glass height	16 7⁄16"	16 7⁄16"	16 7⁄16"

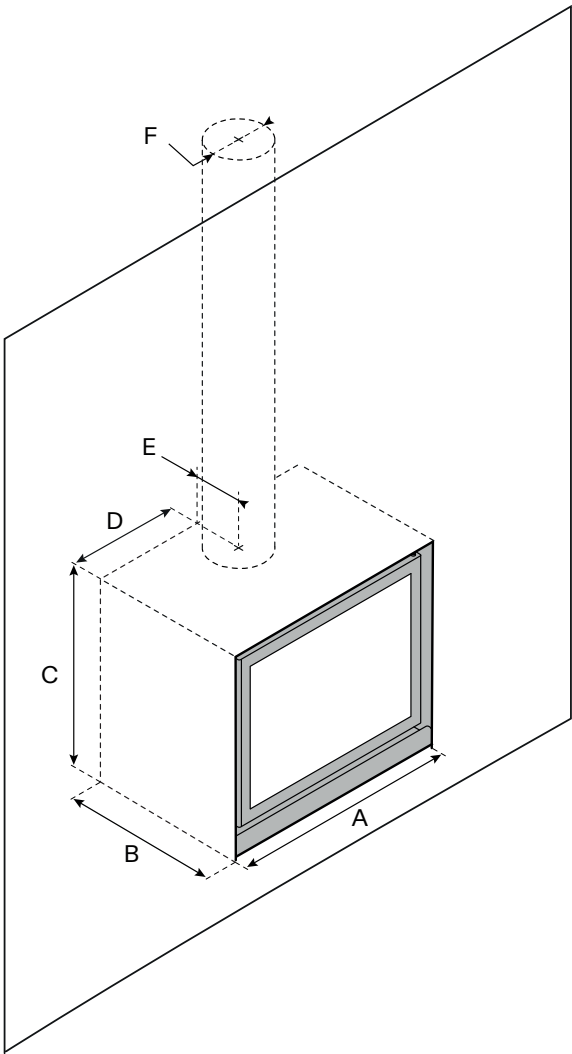




Frames	58	68	78
✦ Available in Canada only			

Thin-edge frame
contour 1/8"




W	22 3/8"	26 3/4"	30 3/4"
H	23 7/8"	23 7/8"	23 7/8"
Color	StüvGrey		

Picture-type frame
contour 2"




W	26 5/8"	30 5/16"	34 1/4"
H	25 1/2"	25 1/2"	25 1/2"
Color	StüvGrey		

Picture-type frame
contour 4"




W	30 5/16"	34 1/4"	38 3/16"
H	27 7/16"	27 7/16"	27 7/16"
Color	StüvGrey		

Picture-type frame
contour 6"



W	34 1/4"	38 3/16"	42 1/8"
H	29 7/16"	29 7/16"	29 7/16"
Color	StüvGrey		

Custom frame
3 sided



L	variable	variable	variable
H	variable	variable	variable
Color	StüvGrey		