






Product

85

95

125

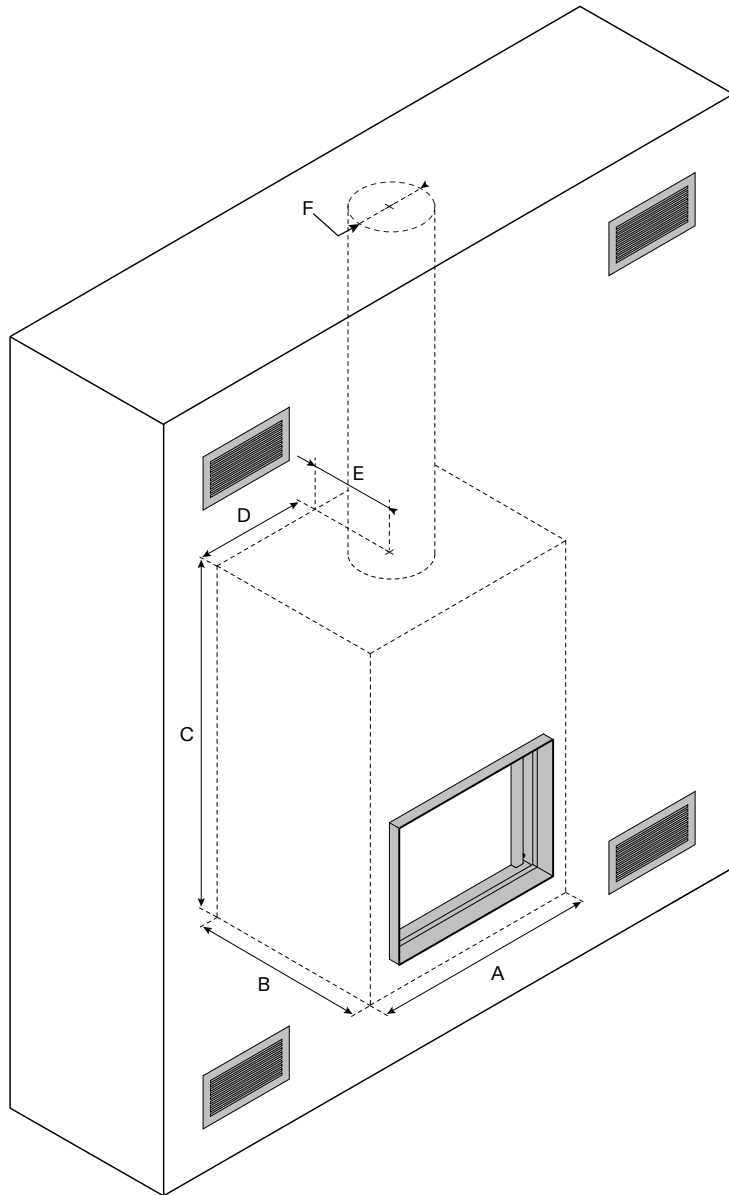

Performances

Burn rate	13 - 15 lb/h	13 - 15 lb/h	13 - 15 lb/h
Maximal heat output	44 000 BTU/h	43 000 BTU/h	60 000 BTU/h
Certifications	UL / ULC	UL / ULC	UL / ULC
Combustion chamber volume	6.5 ft ³	8.4 ft ³	10.6 ft ³
Logs - Maximum length	24"	28"	40"
Estimated heating area	1 400 ft ²	1 600 ft ²	1 800 ft ²
Weight	752 lb	855 lb	960 lb

Dimensions

[A] Width	40"	43 7/8"	55 3/4"
[B] Depth	31 1/2"	31 1/2"	31 1/2"
[C] Height	62"	68 1/4"	62"
[D] Center chimney - side	19 7/8"	21 7/8"	27 3/4"
[E] Center chimney	15 3/4"	15 3/4"	15 3/4"
[F] Chimney diameter	10"	12"	12"
Ø Outside air connection	4"	6"	6"
Glass width	26 1/2"	30 3/8"	42 1/8"
Glass height	21 1/16"	24 1/4"	21 1/16"



Frames

85

95

125

Thin edge frame


1/8" contour



W	31 1/8"	35 1/16"	47 7/8"
H	24"	27 3/16"	24"
Color	StüvGrey ●		

Picture type frame


2 3/8" contour



W	35 7/16"	39 1/2"	51 5/16"
H	28 7/16"	31 5/8"	28 7/16"
Color	StüvGrey ●		

sf4

9 7/16" contour



W	49 3/4"	53 11/16"	65 1/2"
H	42 5/8"	45 3/4"	42 5/8"
Colors	StüvGrey ●	White RAL 9010 ○	
	Black ●	Grey RAL 9007 ●	
		Rust finish ●	




Front panels

85

95


125

sf5



W	42 1/16"	46 5/8"	58 7/16"
H	81 3/4"	88"	81 3/4"
Colors	StüvGrey ●	White RAL 9010 ○	
	Black ●	Grey RAL 9007 ●	
		Rust finish ●	

sf6



W	42 1/16"	46 5/8"	58 7/16"
H	81 3/4"	88"	81 3/4"
Colors	StüvGrey ●	White RAL 9010 ○	
	Black ●	Grey RAL 9007 ●	
		Rust finish ●	