


# Stûv 21.2

## Technical sheet




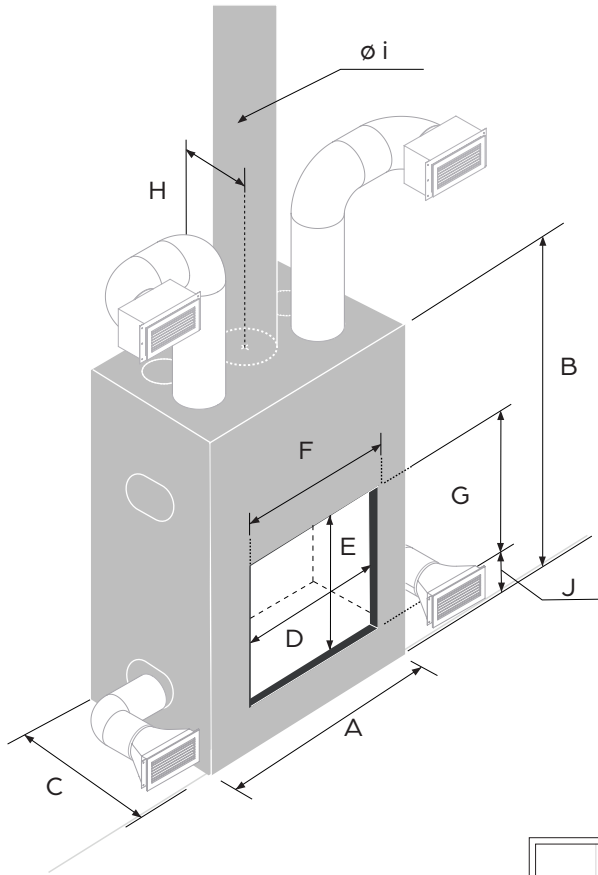


### ADVANTAGES

- Hybrid – Ambiance fire or auxiliary heating
- 
- Versatile convection system
- 
- Can be connected to outside air
- 
- Accessible mechanical components
- 
- High heating power
- 
- Easy to light
- 
- Generates little ash
- 
- Minimalist design
- 
- Wide view of the fire
- 
- Easy to clean

\*These nominal heat outputs were obtained according to a European testing protocol.

For additional information on powers, please see: <https://stuvamerica.com/en/inspirations/tips-and-techniques/power-btu/>  
Dimensions for information only. See the installation manuals for details.




Size	21.2-85	21.2-95	21.2-105	21.2-125
Maximum length of logs	24"	28"	32"	40"
Nominal heat output*	44 000 BTU/h	43 000 BTU/h	65 000 BTU/h	60 000 BTU/h
Heating surface area	1 400 ft <sup>2</sup>	1 600 ft <sup>2</sup>	1 400 ft <sup>2</sup>	1 800 ft <sup>2</sup>
Firebox size	4.8 ft <sup>3</sup>	6.6 ft <sup>3</sup>	5.3 ft <sup>3</sup>	8.4 ft <sup>3</sup>
Convection system	standard	standard	standard	standard
Outside air duct	ø 4-6"	ø 4-6"	ø 4-6"	ø 4-6"
Weight	665 lb	820 lb	688 lb	892 lb
A – Width	40"	43 7/8"	47 7/8"	55 3/4"
B – Height	62 7/8"	68 1/4"	56 1/8"	62 7/8"
C – Depth	26 1/2"	28 1/2"	25"	27 3/4"
D – Glass width	26 1/2"	30 3/8"	34 1/4"	42 1/8"
E – Glass height	21 1/16"	24 1/4"	15 3/4"	21 1/16"
F – Opening width	30 3/4"	34 7/8"	38 3/4"	46 1/2"
G – Opening height	23 3/4"	26 15/16"	18 1/2"	23 3/4"
H – Chimney position	10 1/2"	11 3/4"	11"	11 3/4"
i – Chimney diameter	8"	10"	8"	10"
J – Height to opening	6 1/2"	6 1/2"	6 1/2"	6 1/2"

# FRAMES & FRONT PANELS




Thin edge	21-85	21-95	21-105	21-125
W	31 <sup>5</sup> / <sub>8</sub> "	35 <sup>3</sup> / <sub>16</sub> "	39 <sup>1</sup> / <sub>8</sub> "	47"
H	24 <sup>1</sup> / <sub>8</sub> "	27 <sup>1</sup> / <sub>4</sub> "	18 <sup>13</sup> / <sub>16</sub> "	24 <sup>1</sup> / <sub>8</sub> "

● StûvGrey only




Picture type	21-85	21-95	21-105	21-125
W	35 <sup>5</sup> / <sub>8</sub> "	39 <sup>5</sup> / <sub>8</sub> "	43 <sup>1</sup> / <sub>2</sub> "	51 <sup>3</sup> / <sub>8</sub> "
H	28 <sup>1</sup> / <sub>2</sub> "	31 <sup>5</sup> / <sub>8</sub> "	23 <sup>1</sup> / <sub>4</sub> "	28 <sup>1</sup> / <sub>2</sub> "

● StûvGrey only



SF4	21-85	21-95	21-105	21-125
W	49 <sup>3</sup> / <sub>4</sub> "	53 <sup>3</sup> / <sub>4</sub> "	57 <sup>5</sup> / <sub>8</sub> "	65 <sup>1</sup> / <sub>2</sub> "
H	42 <sup>5</sup> / <sub>8</sub> "	45 <sup>3</sup> / <sub>4</sub> "	37 <sup>3</sup> / <sub>8</sub> "	42 <sup>5</sup> / <sub>8</sub> "


● ○ ● ● ●



SF5	21-85 SF	21-95	21-105	21-125
W	42 <sup>5</sup> / <sub>8</sub> "	46 <sup>5</sup> / <sub>8</sub> "	50 <sup>1</sup> / <sub>2</sub> "	58 <sup>1</sup> / <sub>2</sub> "
H	81 <sup>3</sup> / <sub>4</sub> "	88"	78 <sup>3</sup> / <sub>4</sub> "	81 <sup>3</sup> / <sub>4</sub> "

● ○ ● ● ●


Integrated convection system



SF6	21-85	21-95	21-105	21-125
W	42 <sup>5</sup> / <sub>8</sub> "	46 <sup>5</sup> / <sub>8</sub> "	-	58 <sup>1</sup> / <sub>2</sub> "
H	81 <sup>3</sup> / <sub>4</sub> "	88"	-	81 <sup>3</sup> / <sub>4</sub> "

● ○ ● ● ●

Integrated convection system



SF8	21-85	21-95	21-105	21-125
W	-	-	94 <sup>1</sup> / <sub>2</sub> "	-
H	-	-	18 <sup>7</sup> / <sub>8</sub> "	-

● StûvGrey only

Outer dimensions W = Width | H = Height

Dimensions indicated are for informative purposes only. For more details see installation manual.

# Stûv 21 double face

## Technical sheet






### ADVANTAGES

- Hybrid – Ambiance fire or auxiliary heating
- 
- Versatile convection system
- 
- Can be connected to outside air
- 
- Accessible mechanical components
- 
- High heating power
- 
- Easy to light
- 
- Generates little ash
- 
- Minimalist design
- 
- Wide view of the fire
- 
- Easy to clean

\*These nominal heat outputs were obtained according to a European testing protocol.

For additional information on powers, please see: <https://stuvamerica.com/en/inspirations/tips-and-techniques/power-btu/>

Dimensions for information only. See the installation manuals for details.

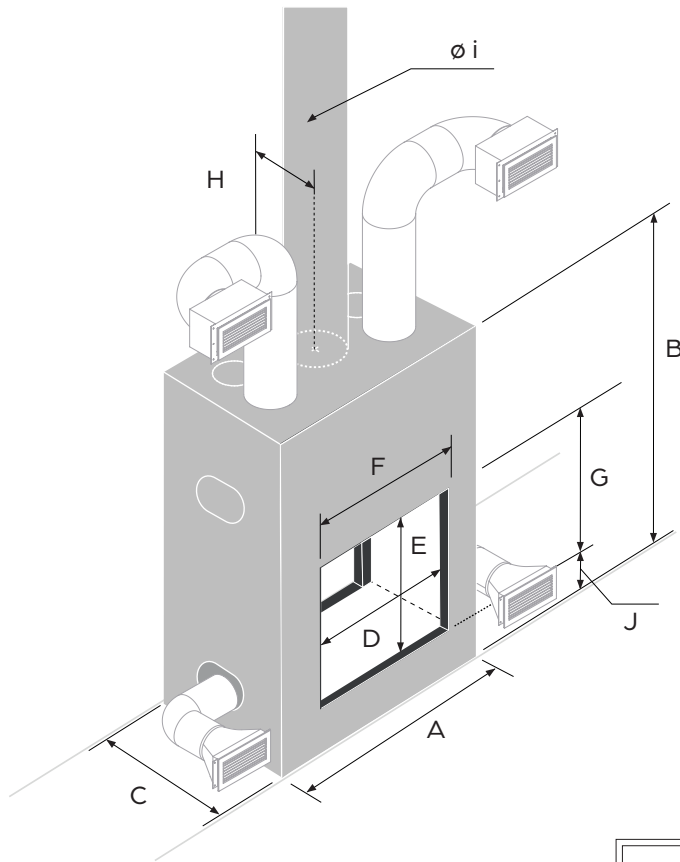

Size	21-85 DF	21-95 DF	21-125 DF
Maximum length of logs	24"	28"	40"
Nominal heat output*	48 000 BTU/h	50 000 BTU/h	61 000 BTU/h
Heating surface area	1 400 ft <sup>2</sup>	1 600 ft <sup>2</sup>	1 800 ft <sup>2</sup>
Firebox size	6.5 ft <sup>3</sup>	8.4 ft <sup>3</sup>	10.6 ft <sup>3</sup>
Convection system	standard	standard	standard
Outside air duct	ø 6"	ø 6"	ø 6"
Weight	752 lb	855 lb	960 lb
A – Width	39 3/4"	43 5/8"	55 1/2"
B – Height	62 7/8"	68 1/4"	62 7/8"
C – Depth	31 1/2"	31 1/2"	31 1/2"
D – Glass width	26 1/2"	30 3/8"	42 1/8"
E – Glass height	21 1/16"	24 1/4"	21 1/16"
F – Opening width	30 3/4"	34 7/8"	46 1/2"
G – Opening height	23 3/4"	26 15/16"	23 3/4"
H – Chimney position	15 3/4"	15 3/4"	15 3/4"
i – Chimney diameter	10"	12"	12"
J – Height to opening	6 1/2"	6 1/2"	6 1/2"

# FRAMES & FRONT PANELS




Thin edge	21-85	21-95	21-105	21-125
W	31 5/8"	35 3/16"	39 1/8"	47"
H	24 1/8"	27 1/4"	18 13/16"	24 1/8"

● StûvGrey only




Picture type	21-85	21-95	21-105	21-125
W	35 5/8"	39 5/8"	43 1/2"	51 3/8"
H	28 1/2"	31 5/8"	23 1/4"	28 1/2"

● StûvGrey only



SF4	21-85	21-95	21-105	21-125
W	49 3/4"	53 3/4"	57 5/8"	65 1/2"
H	42 5/8"	45 3/4"	37 3/8"	42 5/8"


● ○ ● ● ●



SF5	21-85 SF	21-95	21-105	21-125
W	42 5/8"	46 5/8"	50 1/2"	58 1/2"
H	81 3/4"	88"	78 3/4"	81 3/4"

● ○ ● ● ●


Integrated convection system



SF6	21-85	21-95	21-105	21-125
W	42 5/8"	46 5/8"	-	58 1/2"
H	81 3/4"	88"	-	81 3/4"


● ○ ● ● ●

Integrated convection system



SF8	21-85	21-95	21-105	21-125
W	-	-	94 1/2"	-
H	-	-	18 7/8"	-

● StûvGrey only



Outer dimensions W = Width | H = Height

Dimensions indicated are for informative purposes only. For more details see installation manual.