



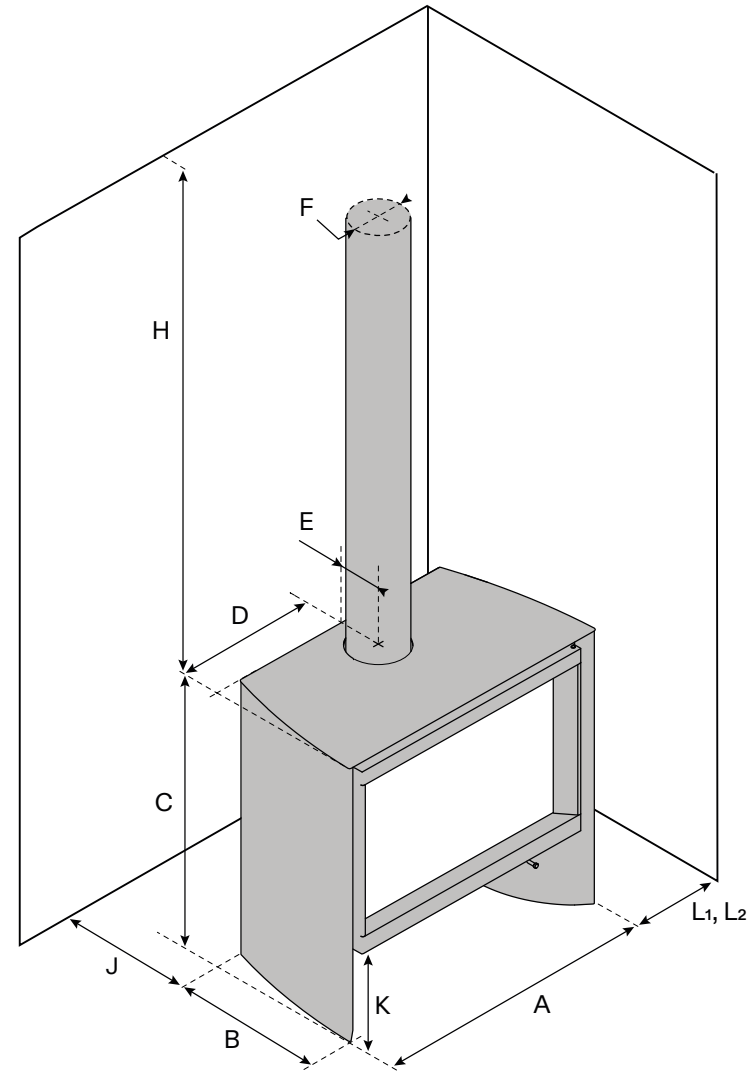

Product

76/60



Black ●

To ensure dimensions, performance data and other prerequisites for a safe installation are in compliance with current regulations, always refer to the installation instructions available on the website www.stuvamerica.com.

Performances	
Particulate matter	1.2 g/h
Burn rate	3.5 lb/h
EPA Efficiency	69 %
Maximum heat output	64 000 BTU/h
EPA heat output	21 067 BTU/h
Nominal heat output	44 000 BTU/h
Certifications	UL / ULC / EPA / CSA B415.1-22
Combustion chamber volume	1.6 ft³
Logs - Maximum length	20"
Estimated heating area	1 400 ft²
Weight	230 lb
Dimensions	
[A] Width	31 5⁄8"
[B] Depth	17 1⁄16"
[C] Height	31 5⁄8"
[D] Center chimney - side	15 13⁄16"
[E] Center chimney - back	5 1⁄4"
[F] Chimney diameter	6"
[H] Min. ceiling clearance	16"
[J] Min. back clearance	4 1⁄2"
[K] Height under appliance	7 9⁄16"
[L1] Min. side clearance	6 1⁄2"
[L2] Alcove min. side clearance	8 1⁄4"
Ø Outside air connection	4"
Glass width	24 1⁄2"
Glass height	16 1⁄16"