




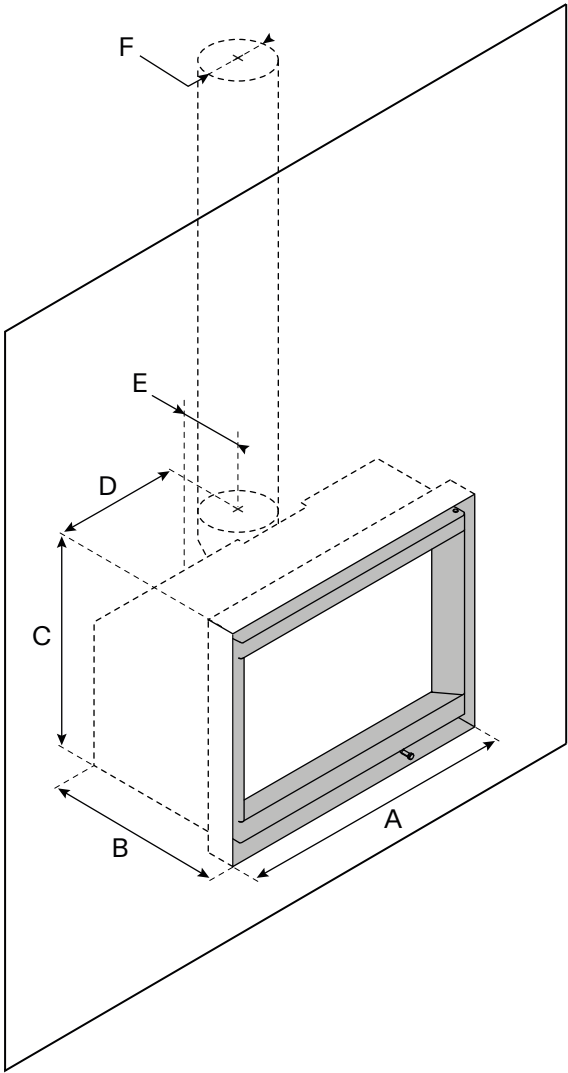


Product

66/50

76/55

76/60



Performances

Particulate matter	1.8 g/h	1.9 g/h	1.2 g/h
Burn rate	3.3 lb/h	3.7 lb/h	3.5 lb/h
EPA Efficiency	67 %	68 %	69 %
Maximum heat output	49 000 BTU/h	58 000 BTU/h	64 000 BTU/h
EPA heat output	19 316 BTU/h	21 732 BTU/h	21 067 BTU/h
Nominal heat output	34 000 BTU/h	39 000 BTU/h	44 000 BTU/h
Certifications	UL / ULC / EPA	UL / ULC / EPA	UL / ULC / EPA
Combustion chamber volume	1.1 ft ³	1.6 ft ³	1.6 ft ³
Logs - Maximum length	16"	20"	20"
Estimated heating area	1 000 ft ²	1 300 ft ²	1 400 ft ²
Weight	165 lb	190 lb	200 lb

Dimensions


[A] Width	24 ½"	28 ⅞"	28 ⅞"
[B] Depth	16 ¼"	16 ¼"	16 ¼"
[C] Height	19 ¼"	21 ¼"	23 ¾"
[D] Center chimney - side	11 ⅝"	13 ⅜"	13 ⅝"
[E] Center chimney - back	4 ⅛"	4 ⅛"	4 ⅛"
[F] Chimney diameter	6"	6"	6"
Ø Outside air connection	4"	4"	4"
Glass width	20 ⅞"	24 ½"	24 ½"
Glass height	12 ⅞"	14 ⅞"	16 ⅞"





Thin-edge frame


1/8" contour



W	26"	29 15/16"	29 15/16"
H	19 11/16"	21 11/16"	23 5/8"
Color	Black ●		

Picture-type frame


2" contour



W	29 3/8"	33 5/16"	33 5/16"
H	21 3/8"	23 3/8"	25 5/16"
Color	Black ●		

Picture-type frame


4" contour



W	33 5/16"	37 1/4"	37 1/4"
H	23 3/8"	25 5/16"	27 5/16"
Color	Black ●		

Picture-type frame


6" contour



W	37 1/4"	41 3/16"	41 3/16"
H	25 5/16"	27 5/16"	29 1/4"
Color	Black ●		

Custom frame

3-sided & 4-sided



W	variable	variable	variable
H	variable	variable	variable
Color	Black ●		