

technical data sheet

s[16]H




Product

✳ Available in Canada only


58



68



✳ 78




Performances

Particulate matter	1.5 g/h	1.7 g/h	1.8 g/h
Burn rate	4.1 lb/h	4.1 lb/h	4.4 lb/h
Efficiency (EPA)	71 %	66 %	67 %
Maximum heat output	65 000 BTU/h	82 000 BTU/h	86 000 BTU/h
EPA heat output	27 015 BTU/h	23 727 BTU/h	27 092 BTU/h
Nominal heat output	46 000 BTU/h	50 000 BTU/h	58 000 BTU/h
Certifications	UL / ULC / EPA / CSA B415.1-22	UL / ULC / EPA / CSA B415.1-22	UL / ULC / CSA B415.1-22
Combustion chamber total	1.6 ft ³	1.9 ft ³	2.2 ft ³
Logs - Maximum length	17"	21"	25"
Estimated heating area	1 400 ft ²	1 650 ft ²	2 100 ft ²
Weight	332 lb	362 lb	396 lb

Dimensions

[A] Width	22 7⁄8"	26 3⁄4"	30 3⁄4"
[B] Depth	18"	18"	18"
[C] Height	39 3⁄4"	39 3⁄4"	39 3⁄4"
[D] Center chimney - side	11 7⁄16"	13 3⁄8"	15 3⁄8"
[E] Center chimney - back	5 1⁄8"	5 1⁄8"	5 1⁄8"
[F] Chimney diameter	6" or 7"	6" or 7"	6" or 7"
[H] Min. ceiling clearance	24 1⁄2"	24 1⁄2"	24 1⁄2"
[J] Min. back clearance	7"	7"	7"
[K] Log storage height	15 3⁄4"	15 3⁄4"	15 3⁄4"
[L1] Min. side clearance	12"	12"	12"
[L2] Recess min. side clearance	15"	15"	15"
Ø Outside air connection	4"	4"	4"
Glass width	17 5⁄8"	21 5⁄8"	25 1⁄2"
Glass height	16 7⁄16"	16 7⁄16"	16 7⁄16"

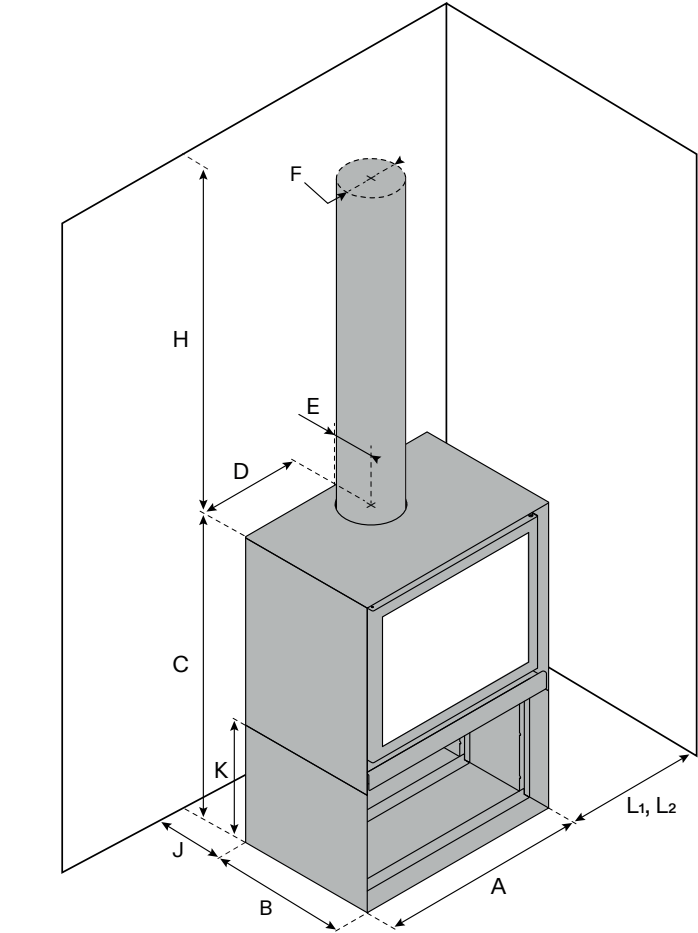

- StuvGrey ●
- StuvBlack ●

To ensure dimensions, performance data and other prerequisites for a safe installation are in compliance with current regulations, always refer to the installation instructions available on the website www.stuvamerica.com.