




Product

58

68

78

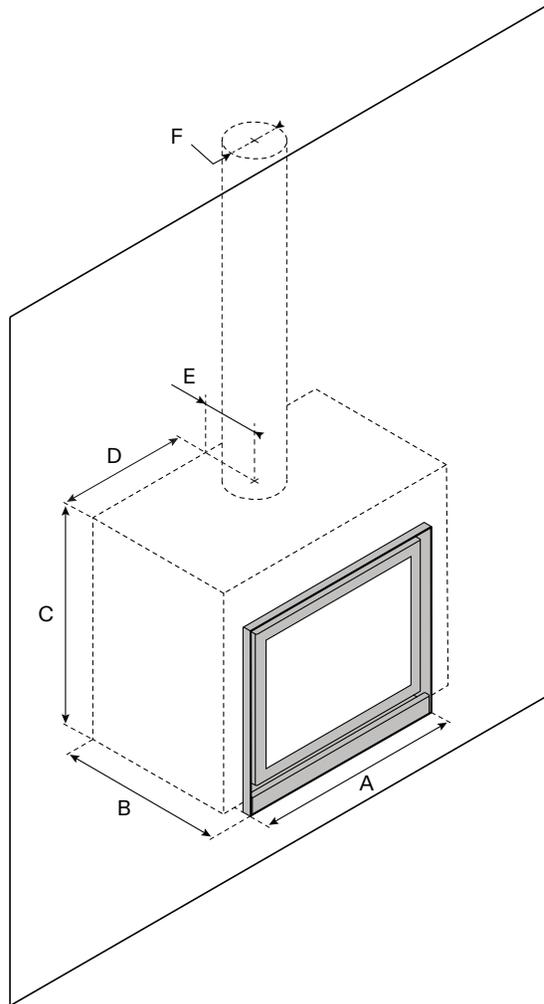

## Performances

Particulate matter	1.5 g/h	1.7 g/h	1.8 g/h
Burn rate	4.1 lb/h	4.1 lb/h	4.4 lb/h
EPA Efficiency	71 %	66 %	67 %
Maximum heat output	65 000 BTU/h	82 000 BTU/h	86 000 BTU/h
EPA heat output	27 015 BTU/h	23 727 BTU/h	27 092 BTU/h
Nominal heat output	46 000 BTU/h	50 000 BTU/h	58 000 BTU/h

## Certifications

	UL / ULC / EPA / CSA B415.1-22	UL / ULC / EPA / CSA B415.1-22	UL / ULC / EPA / CSA B415.1-22
Combustion chamber volume	1.6 ft <sup>3</sup>	1.9 ft <sup>3</sup>	2.2 ft <sup>3</sup>
Logs - Maximum length	17"	21"	25"
Estimated heating area	1 400 ft <sup>2</sup>	1 650 ft <sup>2</sup>	2 100 ft <sup>2</sup>
Weight	232 lb	261 lb	288 lb

## Dimensions

[A] Width	29 3/8"	33 5/16"	37 1/4"
[B] Depth (shell)	19 1/16"	19 1/16"	19 1/16"
[C] Height	29 7/8"	29 7/8"	29 7/8"
[D] Center chimney - side	14 7/8"	16 1/16"	18 1/16"
[E] Center chimney - back	8 1/16"	8 1/16"	8 1/16"
[F] Chimney diameter	6" or 7"	6" or 7"	6" or 7"
Ø Outside air connection	4"	4"	4"
Glass width	17 5/8"	21 5/8"	25 1/2"
Glass height	16 1/16"	16 1/16"	16 1/16"



## Thin-edge frame


contour 1/8"



W	22 7/8"	26 3/4"	30 3/4"
H	23 7/8"	23 7/8"	23 7/8"
Color	StüvGrey ●		

## Picture-type frame


contour 2"



W	26 5/8"	30 5/16"	34 1/4"
H	25 1/2"	25 1/2"	25 1/2"
Color	StüvGrey ●		

## Picture-type frame


contour 4"



W	30 5/16"	34 1/4"	38 3/16"
H	27 7/16"	27 7/16"	27 7/16"
Color	StüvGrey ●		

## Picture-type frame


contour 6"



W	34 1/4"	38 3/16"	42 1/8"
H	29 7/16"	29 7/16"	29 7/16"
Color	StüvGrey ●		

## Custom frame

3-sided



L	variable	variable	variable
H	variable	variable	variable
Color	StüvGrey ●		