






Product

58

68

78




## Performances

Particulate matter	1.5 g/h	1.7 g/h	1.8 g/h
Burn rate	4.1 lb/h	4.1 lb/h	4.4 lb/h
EPA Efficiency	71 %	66 %	67 %
Maximum heat output	65 000 BTU/h	82 000 BTU/h	86 000 BTU/h
EPA heat output	27 015 BTU/h	23 727 BTU/h	27 092 BTU/h
Nominal heat output	46 000 BTU/h	50 000 BTU/h	58 000 BTU/h
Certifications	UL / ULC / EPA / CSA B415.1-22	UL / ULC / EPA / CSA B415.1-22	UL / ULC / EPA / CSA B415.1-22
Combustion chamber volume	1.6 ft <sup>3</sup>	1.9 ft <sup>3</sup>	2.2 ft <sup>3</sup>
Logs - Maximum length	17"	21"	25"
Estimated heating area	1 400 ft <sup>2</sup>	1 650 ft <sup>2</sup>	2 100 ft <sup>2</sup>
Weight	250 lb	272 lb	300 lb

## Dimensions

[A] Width	22 7/8"	26 3/4"	30 3/4"
[B] Depth	18"	18"	18"
[C] Height	24 5/8"	24 5/8"	24 5/8"
[D] Center chimney - side	11 7/16"	13 3/8"	15 3/8"
[E] Center chimney - back	5 1/8"	5 1/8"	5 1/8"
[F] Chimney diameter	6" or 7"	6" or 7"	6" or 7"
[H] Min. ceiling clearance	24 1/2"	24 1/2"	24 1/2"
[J] Min. back clearance	7"	7"	7"
[L1] Min. side clearance	12"	12"	12"
[L2] Recess min. side clearance	15"	15"	15"
Ø Outside air connection	4"	4"	4"
Glass width	17 5/8"	21 5/8"	25 1/2"
Glass height	16 7/16"	16 7/16"	16 7/16"

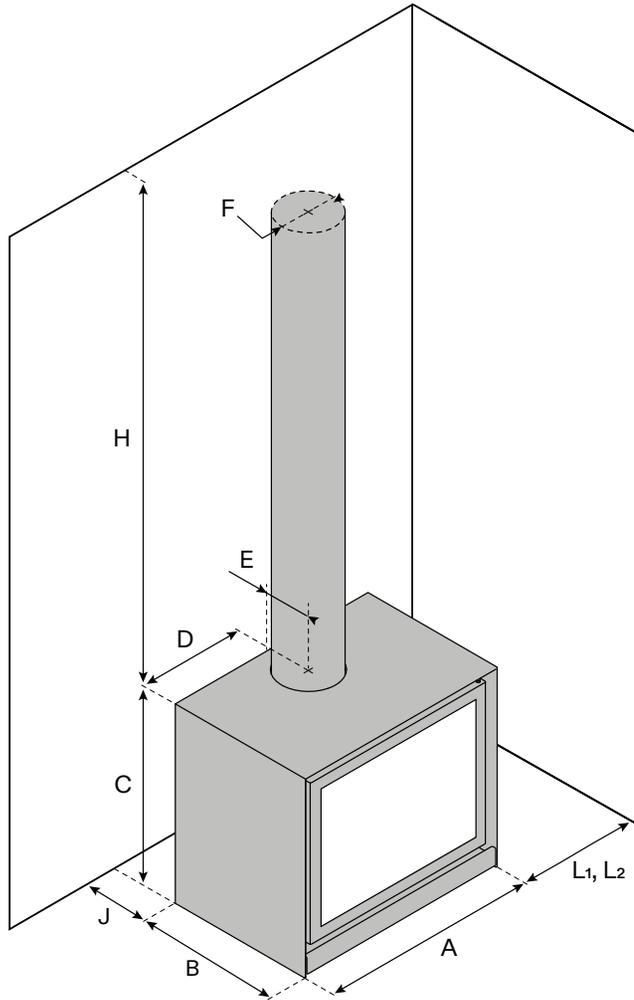

StuvGrey ●

Black ●