

Stûv 21.2 double face

Technical sheet






ADVANTAGES

- Hybrid – Ambiance fire or auxiliary heating
-
- Versatile convection system
-
- Can be connected to outside air
-
- Accessible mechanical components
-
- High heating power
-
- Easy to light
-
- Generates little ash
-
- Minimalist design
-
- Wide view of the fire
-
- Easy to clean

*These nominal heat outputs were obtained according to a European testing protocol.

For additional information on powers, please see: <https://stuvamerica.com/en/inspirations/tips-and-techniques/power-btu/>

Dimensions for information only. See the installation manuals for details.

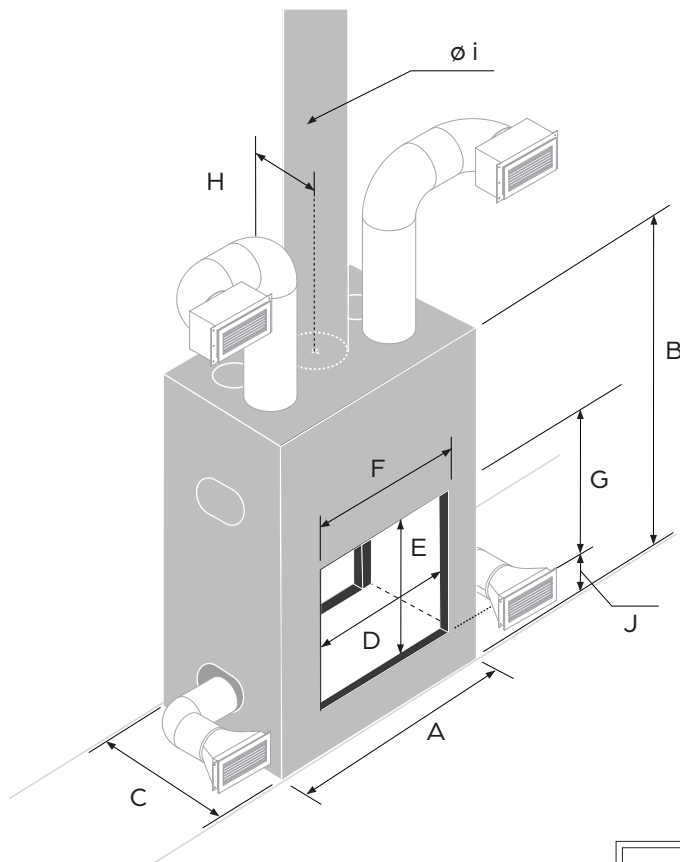

| Size | 21-85 DF | 21-95 DF | 21-125 DF |
|------------------------|-----------------------|-----------------------|-----------------------|
| Maximum length of logs | 24" | 28" | 40" |
| Nominal heat output* | 48 000 BTU/h | 50 000 BTU/h | 61 000 BTU/h |
| Heating surface area | 1 400 ft ² | 1 600 ft ² | 1 800 ft ² |
| Firebox size | 6.5 ft ³ | 8.4 ft ³ | 10.6 ft ³ |
| Convection system | standard | standard | standard |
| Outside air duct | ø 6" | ø 6" | ø 6" |
| Weight | 752 lb | 855 lb | 960 lb |
| A – Width | 39 3/4" | 43 5/8" | 55 1/2" |
| B – Height | 62 7/8" | 68 1/4" | 62 7/8" |
| C – Depth | 31 1/2" | 31 1/2" | 31 1/2" |
| D – Glass width | 26 1/2" | 30 3/8" | 42 1/8" |
| E – Glass height | 21 1/16" | 24 1/4" | 21 1/16" |
| F – Opening width | 30 3/4" | 34 7/8" | 46 1/2" |
| G – Opening height | 23 3/4" | 26 15/16" | 23 3/4" |
| H – Chimney position | 15 3/4" | 15 3/4" | 15 3/4" |
| i – Chimney diameter | 10" | 12" | 12" |
| J – Height to opening | 6 1/2" | 6 1/2" | 6 1/2" |

FRAMES & FRONT PANELS




| Thin edge | 21-85 | 21-95 | 21-105 | 21-125 |
|-----------|----------------------------------|-----------------------------------|------------------------------------|----------------------------------|
| W | 31 ⁵ / ₈ " | 35 ³ / ₁₆ " | 39 ¹ / ₈ " | 47" |
| H | 24 ¹ / ₈ " | 27 ¹ / ₄ " | 18 ¹³ / ₁₆ " | 24 ¹ / ₈ " |

● StûvGrey only




| Picture type | 21-85 | 21-95 | 21-105 | 21-125 |
|--------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| W | 35 ⁵ / ₈ " | 39 ⁵ / ₈ " | 43 ¹ / ₂ " | 51 ³ / ₈ " |
| H | 28 ¹ / ₂ " | 31 ⁵ / ₈ " | 23 ¹ / ₄ " | 28 ¹ / ₂ " |

● StûvGrey only



| SF4 | 21-85 | 21-95 | 21-105 | 21-125 |
|-----|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| W | 49 ³ / ₄ " | 53 ³ / ₄ " | 57 ⁵ / ₈ " | 65 ¹ / ₂ " |
| H | 42 ⁵ / ₈ " | 45 ³ / ₄ " | 37 ³ / ₈ " | 42 ⁵ / ₈ " |


● ○ ● ● ●



| SF5 | 21-85 SF | 21-95 | 21-105 | 21-125 |
|-----|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| W | 42 ⁵ / ₈ " | 46 ⁵ / ₈ " | 50 ¹ / ₂ " | 58 ¹ / ₂ " |
| H | 81 ³ / ₄ " | 88" | 78 ³ / ₄ " | 81 ³ / ₄ " |

● ○ ● ● ●


Integrated convection system



| SF6 | 21-85 | 21-95 | 21-105 | 21-125 |
|-----|----------------------------------|----------------------------------|--------|----------------------------------|
| W | 42 ⁵ / ₈ " | 46 ⁵ / ₈ " | - | 58 ¹ / ₂ " |
| H | 81 ³ / ₄ " | 88" | - | 81 ³ / ₄ " |


● ○ ● ● ●

Integrated convection system



| SF8 | 21-85 | 21-95 | 21-105 | 21-125 |
|-----|-------|-------|----------------------------------|--------|
| W | - | - | 94 ¹ / ₂ " | - |
| H | - | - | 18 ⁷ / ₈ " | - |

● StûvGrey only



Outer dimensions W = Width | H = Height

Dimensions indicated are for informative purposes only. For more details see installation manual.